
Common Mode Choke TCB60405-124V



Outline: 产品概要

- Rated current 2.0A 额定电流 2.0A
- High permeability nanocrystalline core material
  高导磁率纳米晶磁芯材料
- Flammability corresponding to UL94V-0
  阻燃性符合 UL94V-0
- Operating temperature: -40°C~+125°C
  工作温度: -40°C~+125°C
- Direct drop-in replacement, pin-to-pin compatible with VAC T60405-R6131-X402.
  可以直接替代 VAC 的同类产品 T60405-R6131-X402

1、Appearance and dimensions(mm) 外形尺寸

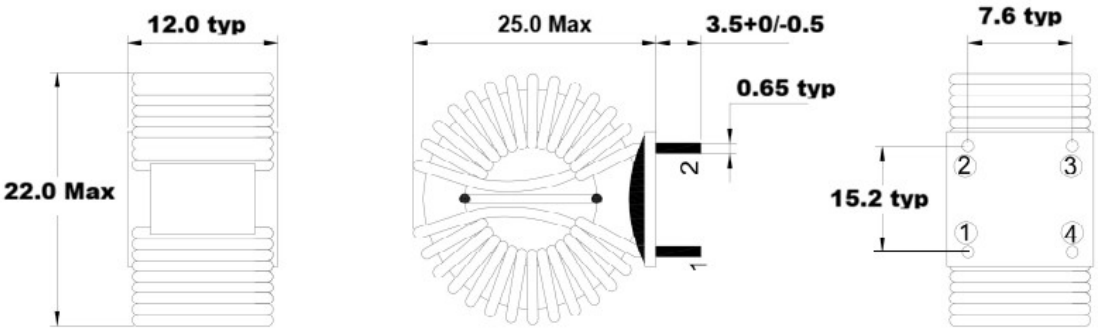


2.、Marking 印字标识



※ Marking is available if needed
如果需要，产品可印字。

3、Schematic 原理图

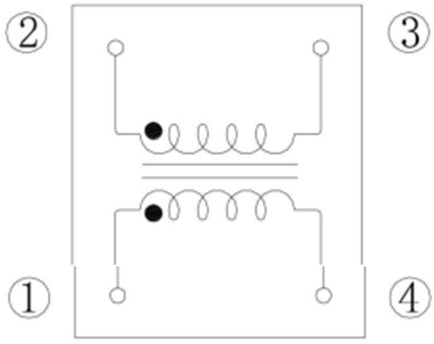

This product is not authorized for use in any application related to safety.


Specification subject to change without notice. Please check web site for latest information.


Common Mode Choke TCB60405-124V

3、Electrical characteristics 电气特性

Item	F = 10kHZ	F = 100kHz	DC
L (mH)	12.1	2.82	
|Z| (Ω)	900	3000	
I unbal	12	25	11

4、Impedance vs Frequency Curve

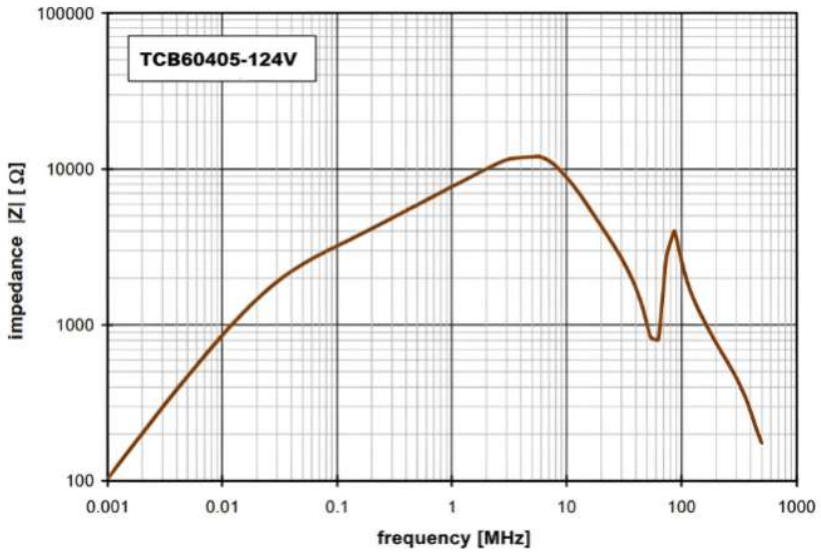


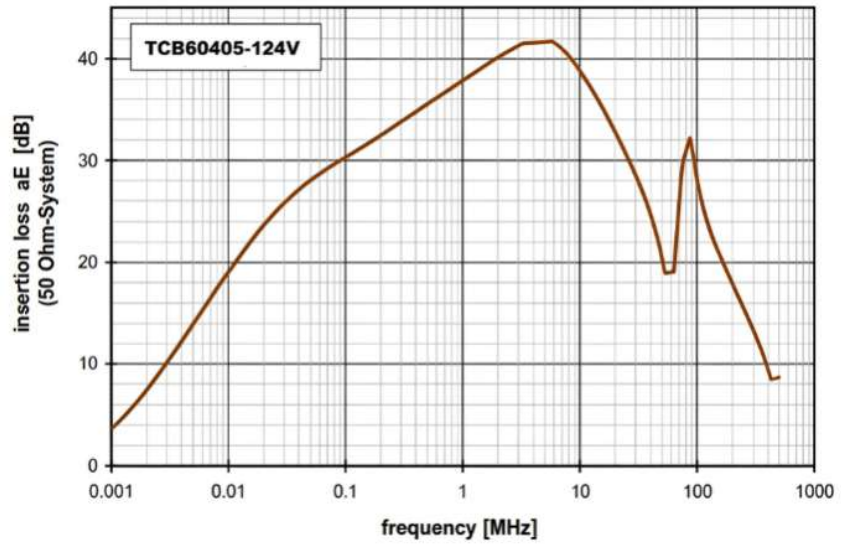


Common Mode Choke TCB60405-124V

5、Packing specification 包装规格

5.1、Plastic tray dimensions (mm) 吸塑盘尺寸（mm）

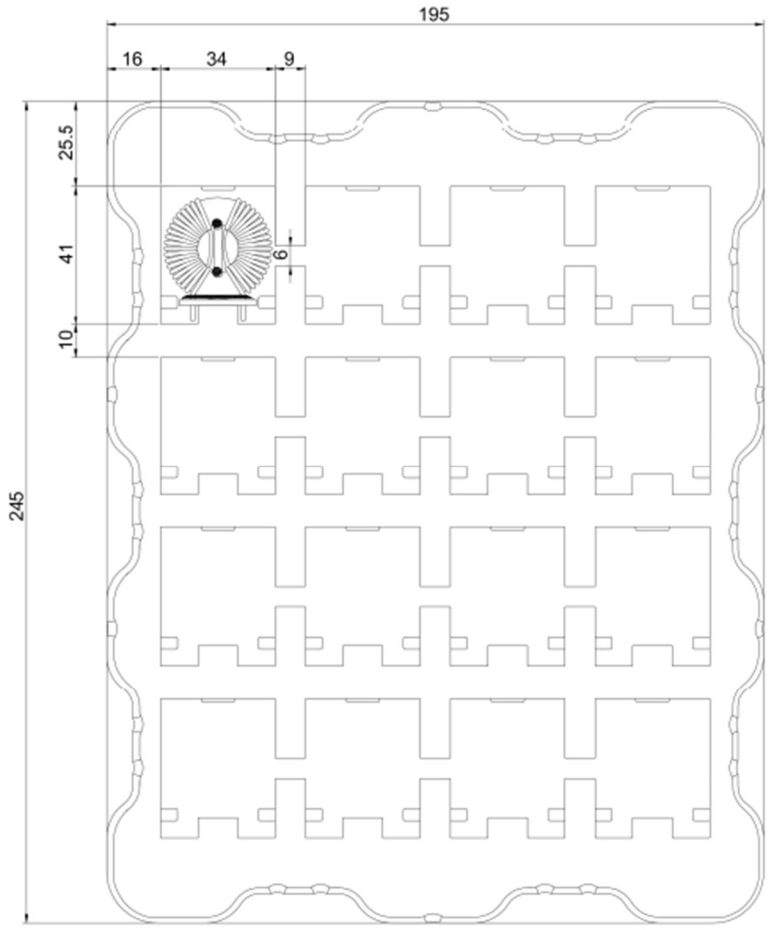

5.2、Packing 包装

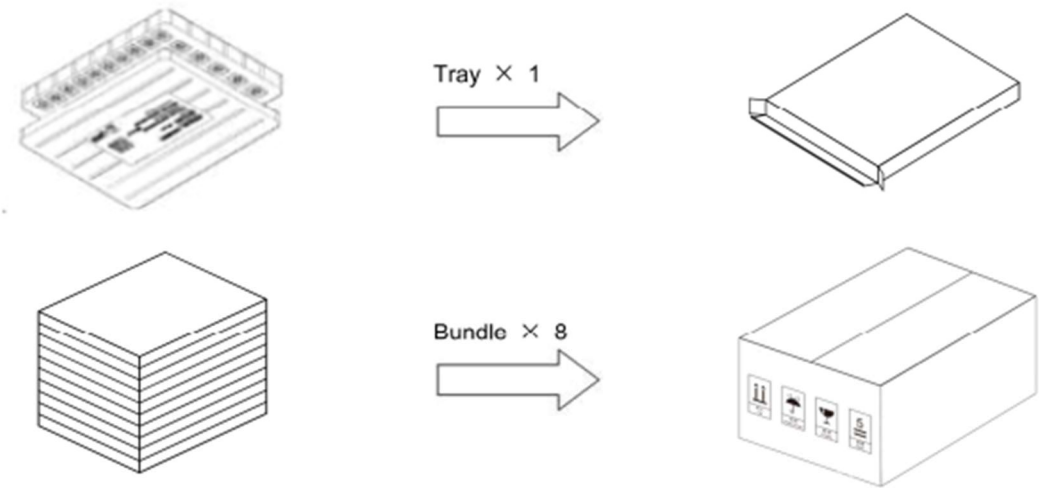

This product is not authorized for use in any application related to safety.

Specification subject to change without notice. Please check web site for latest information.

Common Mode Choke TCB60405-124V

5.3、Carton dimensions and packing quantity 包装箱尺寸和包装数量

■ Inner Carton：265×205×30mm
内包装盒

■ Out Carton ：275×232×261mm
外包装箱

Product Series 产品系列	Quantity / Tray 数量 / 盘	Inner Carton Quantity 内盒 包装数量	Out Carton Quantity 外箱 包装总数量
TCB60405-124V	16pcs	(16×1) = 16pcs	(16×8) = 128pcs

5.4、Label marking 标签标识

The following items will be marked on the tray of product label and shipping label.

以下项目将明确标识于产品吸塑盘标签以及运输标签上

Production Label
产品标签
- ■ Packing No.
  包装流水号
- ■ Quantity
  数 量
- ■Shipment Date
  出货日期
- ■ Part No.
  产品型号
- ■Customer Part No.
  客户型号
- ■ Customer Po No.
  客户订单号

Shipping Label
运输标签
- ■ Packing No.
  包装流水号
- ■ Quantity
  数 量
- ■Shipment Date
  出货日期
- ■ Part No.
  产品型号
- ■Customer Part No.
  客户型号
- ■ Customer Po No.
  客户订单号

This product is not authorized for use in any application related to safety.

Specification subject to change without notice. Please check web site for latest information.